

SMTOAK2 Series

Surface Mount – SMTO-263-2 kA

PRELIMINARY & CONFIDENTIAL

Littelfuse, Inc. has characterized initial samples of this device and is currently conducting reliability testing. Parts numbers and specifications are subject to change until the datasheet is made final.



Maximum Ratings and Thermal Characteristics

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Current Rating ¹	I_{PP}	2	kA
Steady State Power Dissipation on Infinite Heat Sink at $T_J = 75^\circ\text{C}$	P_D	15	W
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 150	$^\circ\text{C}$
Typical Thermal Resistance Junction to case	$R_{\theta JC}$	1.8	$^\circ\text{C/W}$

Note:

1. Rated I_{PP} measured with 8/20 μs pulse.


Description

The SMTOAK2 TVS is housed in a modified SMTO-263 package, achieving a compact mechanical design and compatible with automated PCB assembly. The SMTOAK2 series is designed to protect sensitive electronics against surge events and inductive load switching voltage transient events.

Features

- SMTO-263 package, footprint compatible with industry popular DO-218AB package
- $V_{BR} @ T_J = V_{BR} @ 25^\circ\text{C} \times (1 + \alpha T \times (T_J - 25))$ (αT : Temperature Coefficient, typical value is 0.1%)
- Glass passivated chip junction in modified TO-263 package
- ESD protection of data lines in accordance with IEC 61000-4-2, 30 kV(Air), 30 kV (Contact)
- Fast response time: typically less than 1.0 ps from 0 Volts to V_{BR} min
- Excellent clamping capability
- Low incremental surge resistance
- UL Recognized compound meeting flammability rating UL94 V-0
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260°C
- Surface mount package to optimize board space
- High temperature reflow soldering guaranteed: $260^\circ\text{C}/10$ sec at terminals
- Matte tin lead-free plated
- Halogen free and RoHS compliant
- Pb-free E3 means 2nd level interconnect is Pb-free and the terminal finish material is tin (Sn) (IPC/JEDEC J-STD-609A.01)

Functional Diagram

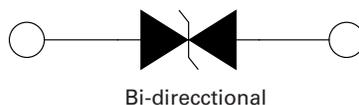

Applications

Designed to protect sensitive electronics from:

- Over voltage surge transients
- Inductive load switching voltage transients

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)


Part Number	Part Marking	Stand off Voltage V_{SO}	Breakdown Voltage V_{BR} (Volts) @ I_T		Test Current I_T	Maximum Peak Pulse Current I_{PP} (10/350 μs)	Maximum Clamping Voltage V_C @ I_{PP} (8/20 μs)	Maximum Peak Pulse Current I_{PP} (8/20 μs)	Maximum Reverse Leakage I_R @ V_R	Maximum Temperature coefficient of V_{BR}
		(V)	Min	Max	(mA)	(A)	(V)	(A)	(μA)	(%/C)
SMTOAK2-070C	SM2K70C	70	78.20	86.02	5	250	130	2000	2	0.074

SMT0AK2 Series

Surface Mount – SMT0-263-2 kA

PRELIMINARY & CONFIDENTIAL
 Littelfuse, Inc. has characterized initial samples of this device and is currently conducting reliability testing. Parts numbers and specifications are subject to change until the datasheet is made final.

I-V Curve Characteristics

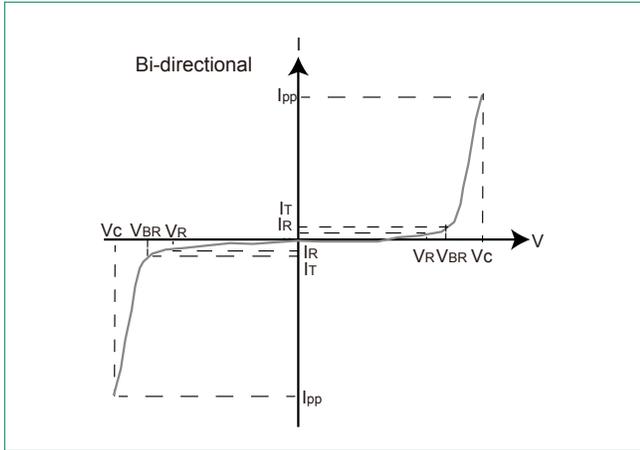

- P_{PPM} Peak Pulse Power Dissipation** – Max power dissipation
- V_{SO} Stand-off Voltage** – Maximum voltage that can be applied to the TVS without operation
- V_{BR} Breakdown Voltage** – Maximum voltage that flows through the TVS at a specified test current (I_T)
- V_C Clamping Voltage** – Peak voltage measured across the TVS at a specified I_{PPM} (peak impulse current)
- I_R Reverse Leakage Current** – Current measured at V_R

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Figure 1 - Peak Pulse Power Rating Curve


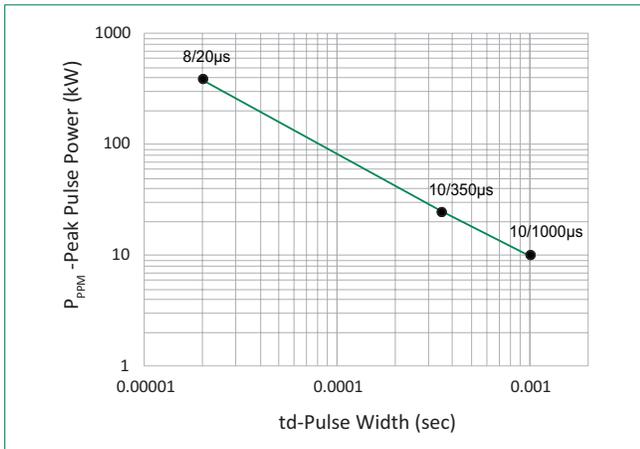


Figure 2 - Peak Pulse Power Derating Curve

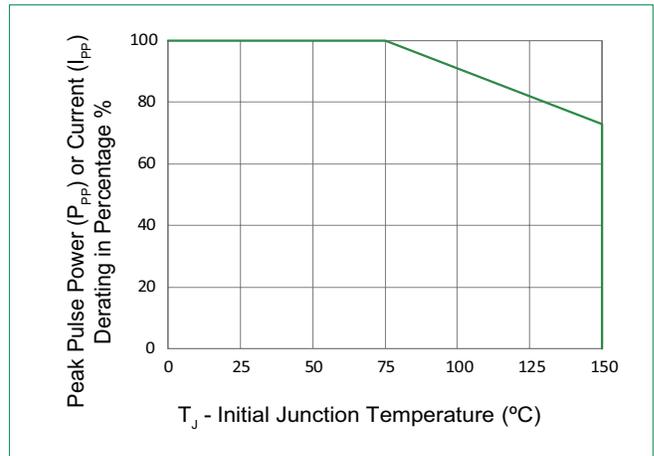

SMT0AK2 Series


Surface Mount – SMT0-263-2 kA

PRELIMINARY & CONFIDENTIAL

Littelfuse, Inc. has characterized initial samples of this device and is currently conducting reliability testing. Parts numbers and specifications are subject to change until the datasheet is made final.

Soldering Parameters

Reflow Condition		Pb – Free assembly
Pre Heat	- Temperature Min ($T_{s(min)}$)	150 °C
	- Temperature Max ($T_{s(max)}$)	200 °C
	- Time (min to max) (t_s)	60 - 120 secs
Average ramp up rate (Liquidus Temp (T_L) to peak		5 °C/second max
$T_{s(max)}$ to T_A - Ramp-up Rate		5 °C/second max
Reflow	- Temperature (T_L) (Liquidus)	217 °C
	- Time (min to max) (T_s)	60 – 150 seconds
Peak Temperature (T_p)		260 ^{+0/-5} °C
Time within 5 °C of actual peak Temperature (t_p)		30 seconds
Ramp-down Rate		5 °C/second max
Time 25 °C to peak Temperature (T_p)		8 minutes Max.
Do not exceed		260 °C

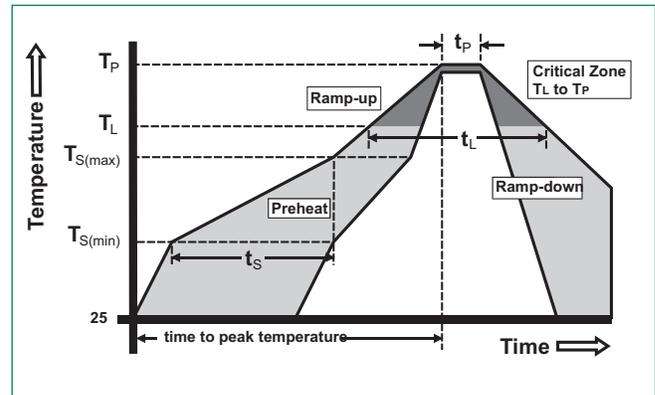


Physical Specifications

Terminal Finish	100% Matte Tin-plated
Body Material	UL Recognized compound meeting flammability classification UL94 V-0
Lead Material	Copper Alloy

Environmental Specifications

High Temp. Storage	JESD22-A103
HTRB	JESD22-A108
Temperature Cycling	JESD22-A104
MSL	JEDEC-J-STD-020, LEVEL 1
H3TRB	JESD22-A101
RSH	JESD22-A111

Dimensions

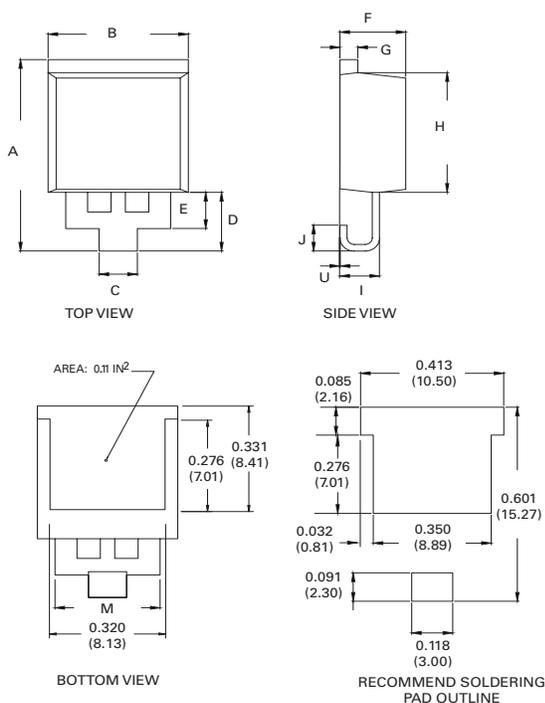

Dimensions	Inches		Millimeters	
	Min	Max	Min	Max
A	0.568	0.600	14.44	15.24
B	0.380	0.420	9.65	10.67
C	0.098	0.114	2.50	2.90
D	0.169	0.189	4.30	4.80
E	0.102	0.118	2.60	3.00
F	0.178	0.188	4.52	4.78
G	0.045	0.060	1.14	1.52
H	0.360	0.370	9.14	9.40
I	0.106	0.122	2.69	3.09
J	0.069	0.089	1.75	2.25
M	0.284	0.300	7.22	7.62
U	0	0.010	0	0.25


SMT0AK2 Series

Surface Mount – SMT0-263-2 kA


PRELIMINARY & CONFIDENTIAL

Littelfuse, Inc. has characterized initial samples of this device and is currently conducting reliability testing. Parts numbers and specifications are subject to change until the datasheet is made final.

Part Numbering System

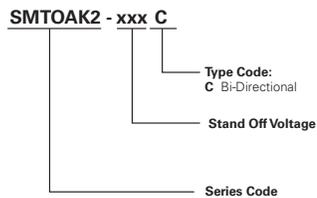

Part Marking System

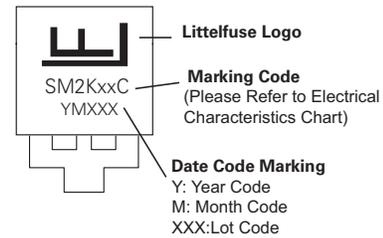


Packing Option

Part Number	Component Package	Quantity	Packaging Option
SMT0AK2-xxx C	SMT0-263	500	Embossed Carrier

SMT0-263 Embossed Carrier Reel Pack (RP) Specifications

Meets all EIA-481-2 Standards

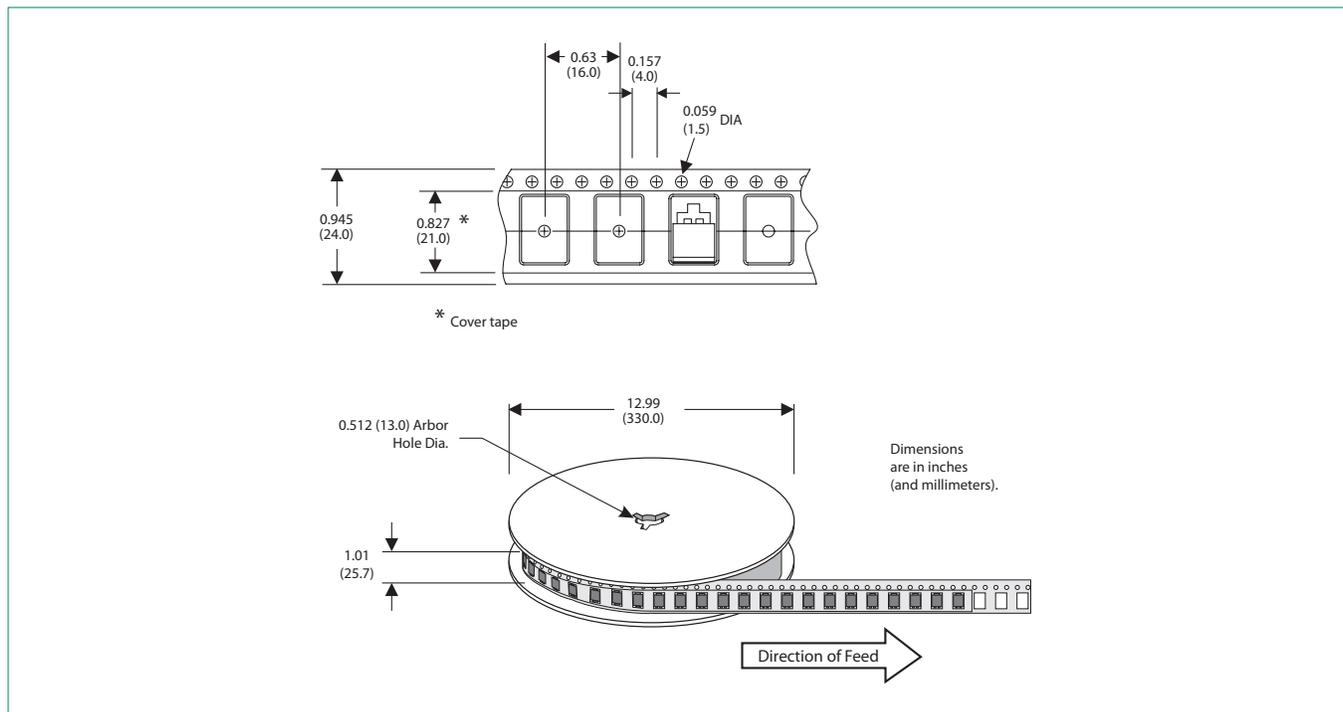

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Littelfuse:](#)

[SMTOAK2-070C](#)