

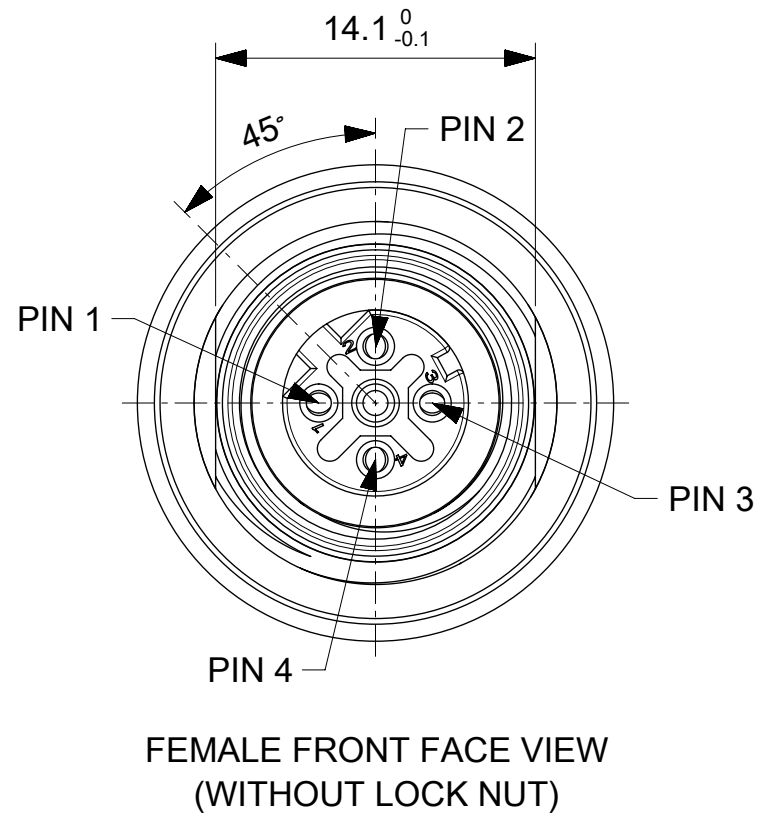
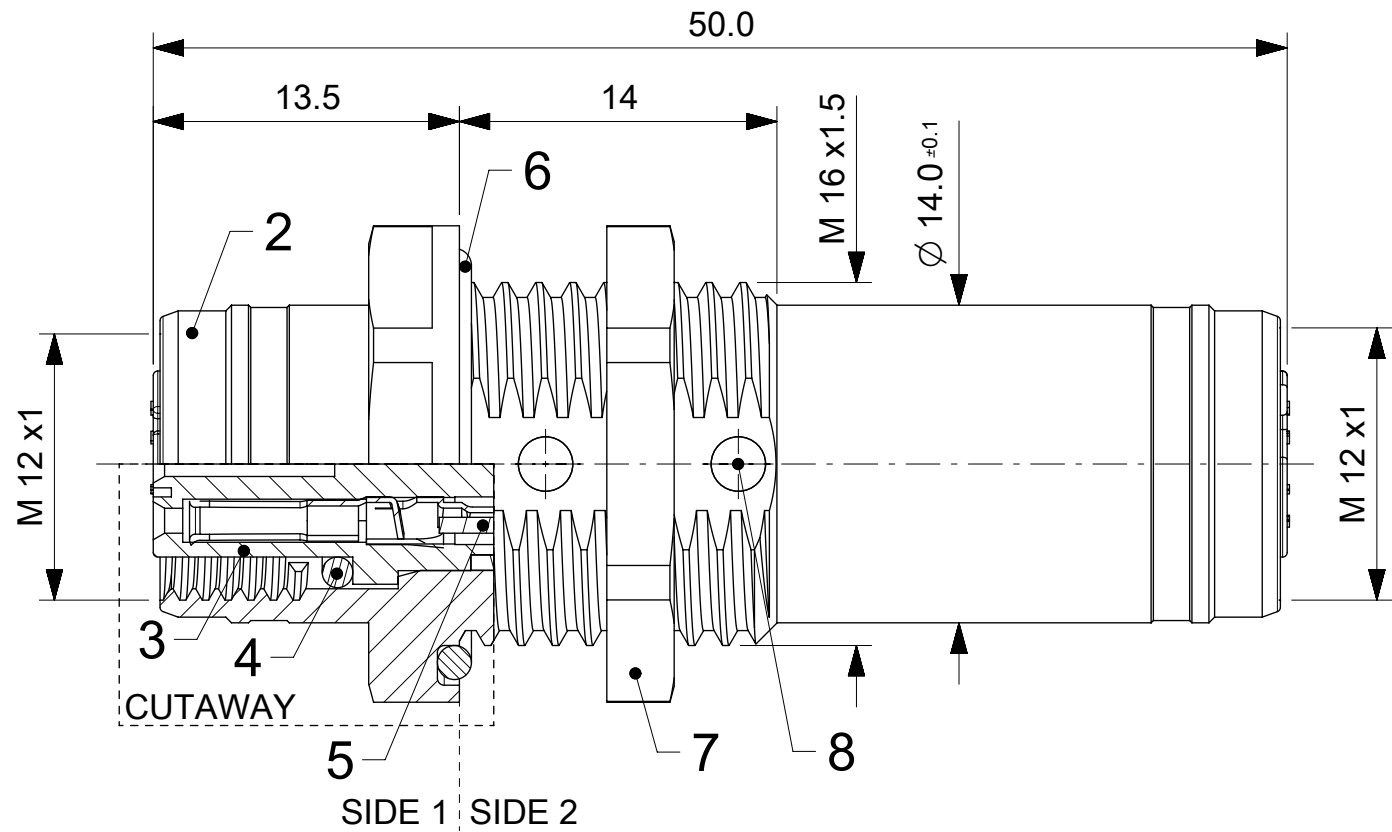
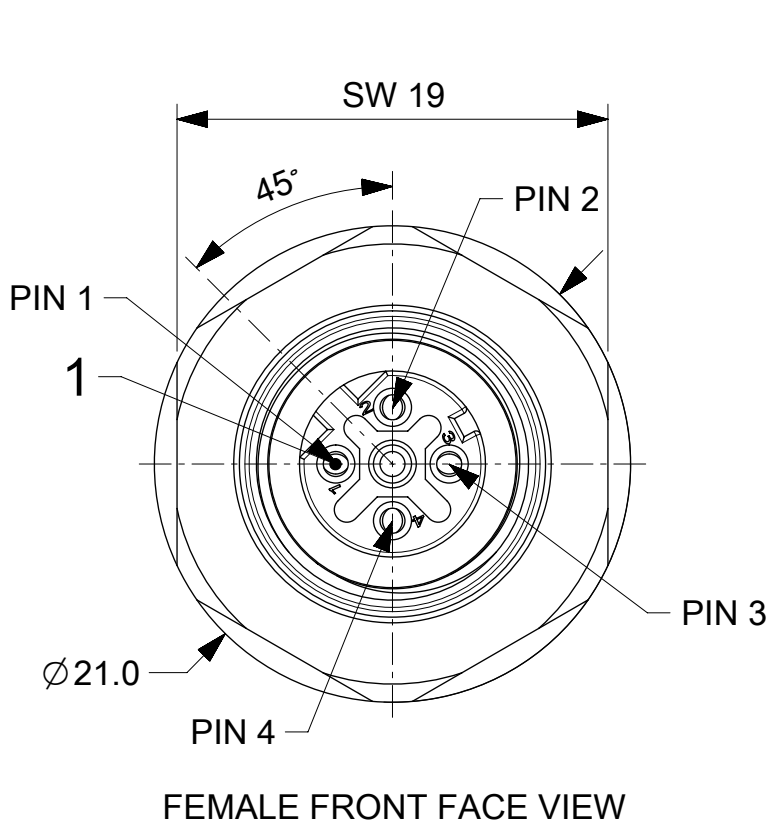


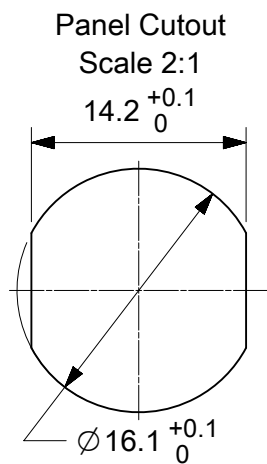


WIRING DIAGRAM

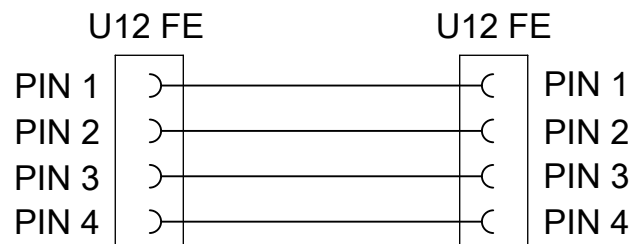

8	-	POTTING MATERIAL 2-CMPT	PUR-BASE	---
7	1	LOCKNUT SW19 M16x1.5	BRASS	NICKEL
6	1	ORING Ø16mm BLACK	EPDM	---
5	-	WIRES 0.35mm ²	PVC	---
4	2	ORING Ø7.1mm RED	FPM	---
3	2	INSERT FEMALE 5P AC BLACK	PUR	---
2	1	SHELL U12/M16/U12	BRASS	NICKEL
1	8	CONTACT M12 FEMALE	BRONZE	SELECTIVE Au OVER Ni
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

NOTES:
CONTACT CURRENT RATING: 4A
VOLTAGE RATING: 60V
TEMPERATURE: -25°C / +85°C
INTERNATIONAL PROTECTION: SIDE 1 - IP 67/68/69K
SIDE 2 - IP65

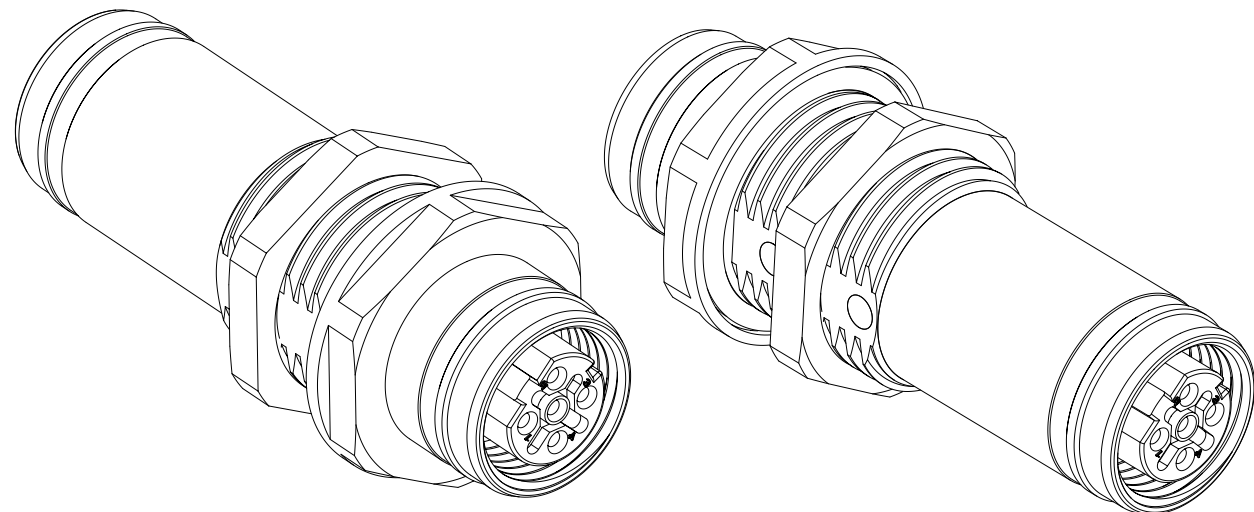

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																			
QUALITY SYMBOLS		2016/11/15 2016/11/22		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS		SCALE		molex®									
FA = 0						MM		3:1											
FE = 0						DRWN BY		DATE											
FB = 0						JMARSAZEK		2016/08/11		REC U12 U12 4P DC FE FE M16 BULKHEAD									
▼ = 0						CHK'D BY		DATE											
C = 0						APPR BY		DATE											
X = 0						EC NO: 110653		DRWN: JMARSZALEK		RSILLER		2016/08/29		PRODUCT CUSTOMER DRAWING					
■ = 0						CHK'D: RSILLER		APPR: RSILLER		DRAWING SIZE		THIRD ANGLE PROJECTION							SERIES
C = 0						A1		REV		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		A3		120084		1200848170		GENERAL MARKET	
														DOCUMENT NUMBER		DOC TYPE		DOC PART	
										1200848170		PSD		000		1 OF 1			