


Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

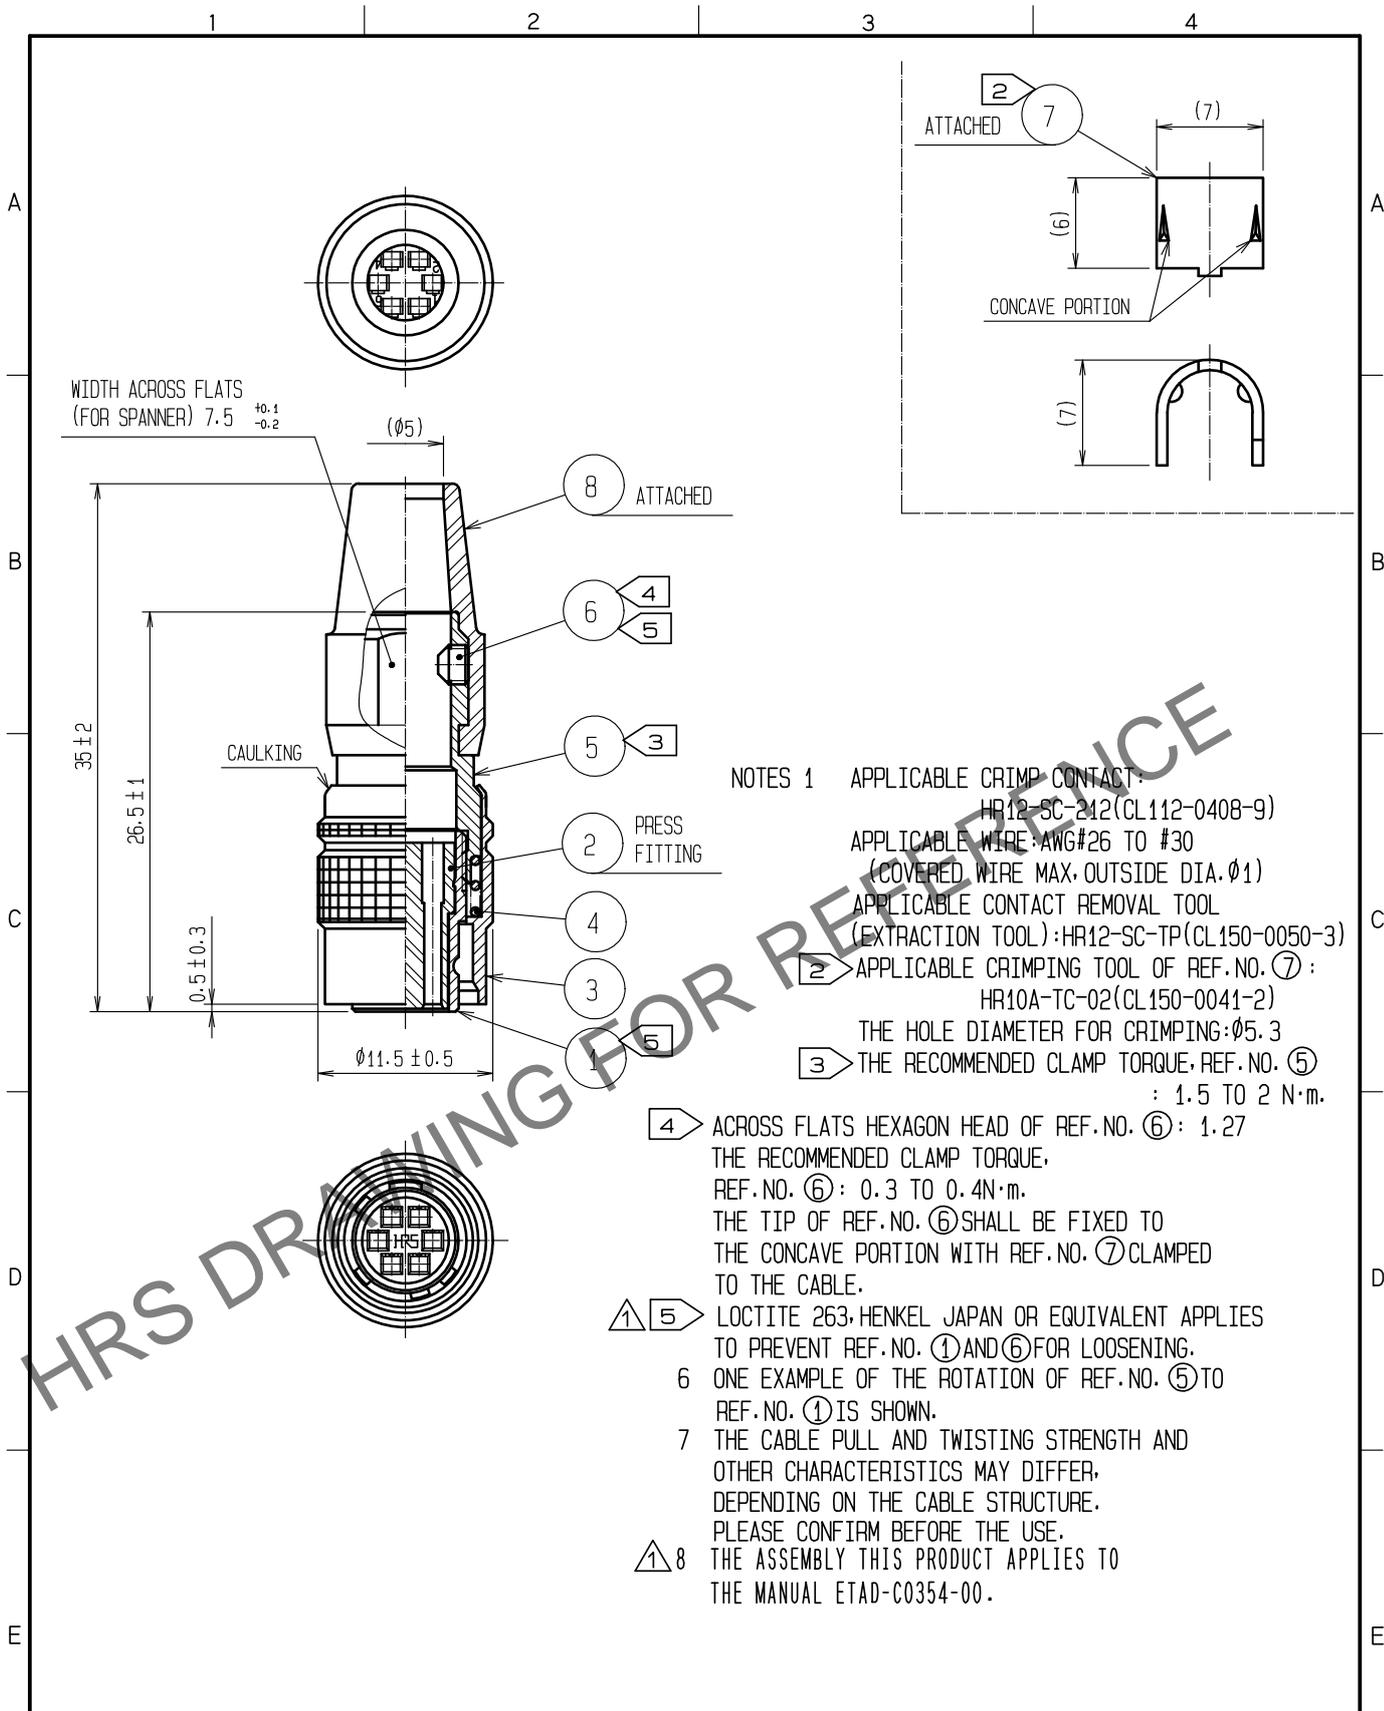

- NOTES 1 APPLICABLE CRIMP CONTACT: HR12-SC-212(CL112-0408-9)  
 APPLICABLE WIRE: AWG#26 TO #30 (COVERED WIRE MAX. OUTSIDE DIA. Ø1)  
 APPLICABLE CONTACT REMOVAL TOOL (EXTRACTION TOOL): HR12-SC-TP(CL150-0050-3)  
 ② APPLICABLE CRIMPING TOOL OF REF. NO. ⑦: HR10A-TC-02(CL150-0041-2)  
 THE HOLE DIAMETER FOR CRIMPING: Ø5.3  
 ③ THE RECOMMENDED CLAMP TORQUE, REF. NO. ⑤: 1.5 TO 2 N·m.  
 ④ ACROSS FLATS HEXAGON HEAD OF REF. NO. ⑥: 1.27 THE RECOMMENDED CLAMP TORQUE, REF. NO. ⑥: 0.3 TO 0.4N·m.  
 THE TIP OF REF. NO. ⑥ SHALL BE FIXED TO THE CONCAVE PORTION WITH REF. NO. ⑦ CLAMPED TO THE CABLE.  
 ① ⑤ LOCTITE 263, HENKEL JAPAN OR EQUIVALENT APPLIES TO PREVENT REF. NO. ① AND ⑥ FOR LOOSENING.  
 ⑥ ONE EXAMPLE OF THE ROTATION OF REF. NO. ⑤ TO REF. NO. ① IS SHOWN.  
 ⑦ THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER, DEPENDING ON THE CABLE STRUCTURE. PLEASE CONFIRM BEFORE THE USE.  
 ① ⑧ THE ASSEMBLY THIS PRODUCT APPLIES TO THE MANUAL ETAD-C0354-00.

4	STEEL	NICKEL PLATING	8	CHLOROPRENE RUBBER	(BLACK)
3	BRASS	MATTE FINISH NICKEL PLATED	7	BRASS	
2	POLYBUTYLENE TEREPHTHALATE	(BLACK) UL94V-0	6	STEEL	NICKEL PLATING M2.6X0.45X2
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	5	BRASS	NICKEL PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 2 : 1	COUNT ① 2	DESCRIPTION OF REVISIONS DIS-C-00017346	DESIGNED HT. ZENBA	CHECKED HY. KOBAYASHI	DATE 20240508
<b>HRS</b> HIROSE ELECTRIC CO., LTD.	APPROVED : MO. SATOH	20070308	DRAWING NO.	EDC4-025177-73			
	CHECKED : EJ. KUNII	20070308	PART NO.	HR10A-7P-6SC(73)			
	DESIGNED : TO. HORII	20070308	CODE NO.	CL0110-0504-0-73			
	DRAWN : MK. SATO	20070308		① 1/1			