


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

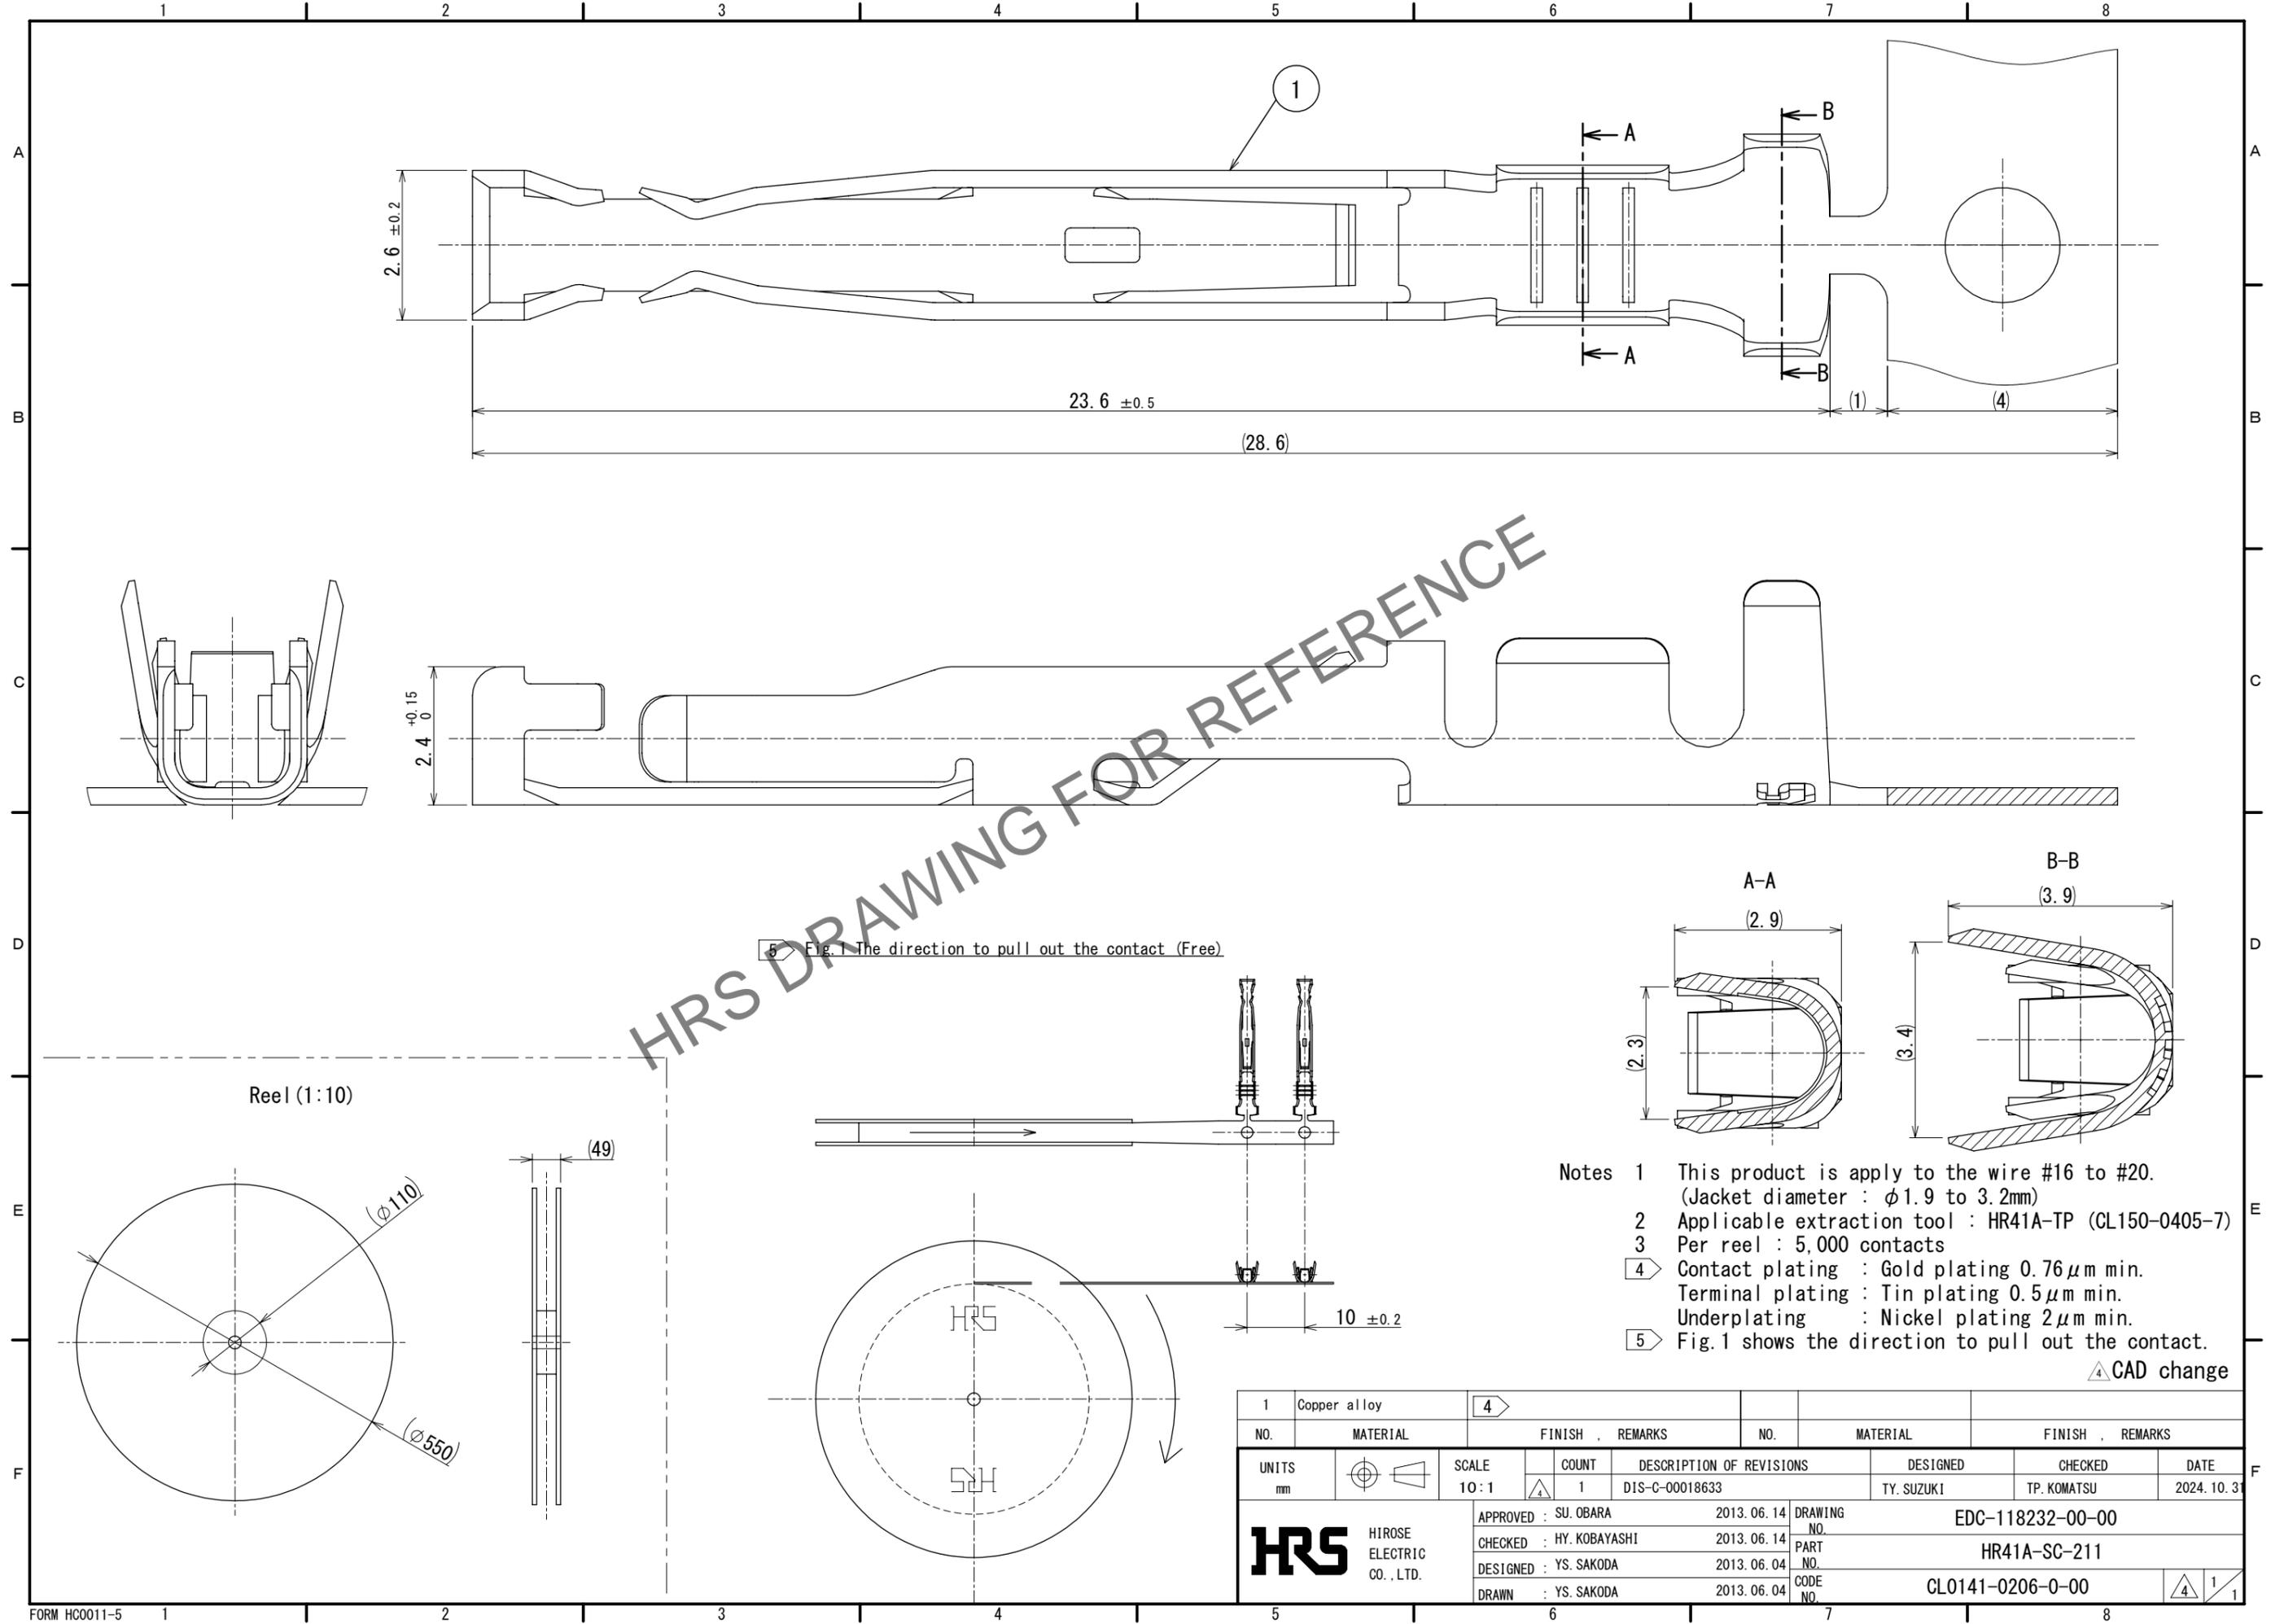

HRS DRAWING FOR REFERENCE

- Notes
- 1 This product is apply to the wire #16 to #20.
(Jacket diameter : φ1.9 to 3.2mm)
 - 2 Applicable extraction tool : HR41A-TP (CL150-0405-7)
 - 3 Per reel : 5,000 contacts
 - 4 Contact plating : Gold plating 0.76 μm min.
Terminal plating : Tin plating 0.5 μm min.
Underplating : Nickel plating 2 μm min.
 - 5 Fig.1 shows the direction to pull out the contact.
- △ CAD change

1	Copper alloy	4					
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
UNITS	mm	SCALE	10:1	COUNT	1	DESCRIPTION OF REVISIONS	DIS-C-00018633
APPROVED : SU. OBARA		2013. 06. 14		DRAWING NO.		EDC-118232-00-00	
CHECKED : HY. KOBAYASHI		2013. 06. 14		PART NO.		HR41A-SC-211	
DESIGNED : YS. SAKODA		2013. 06. 04		CODE NO.		CL0141-0206-0-00	
DRAWN : YS. SAKODA		2013. 06. 04					
						1/1	